


#### KTM DUKE

125 / 250 / 390 MODEL 2017+ TAIL TIDY

**Installation Instructions** 



### **Kit contents**

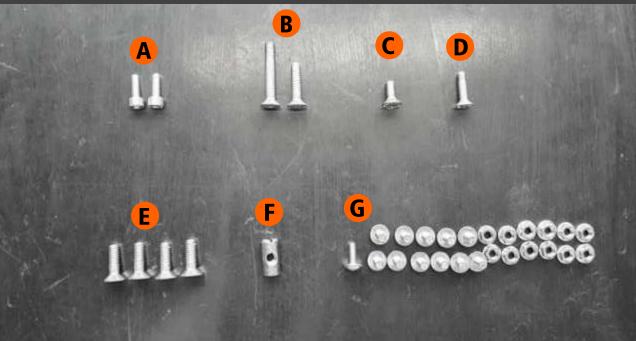


### **Installation Instructions**


#### **X** Tools needed

- Wrench size 8, 10, 12
- Allen key size 3, 4, 5
- Hexagonal head screwdriver size 3
- Crosstip screwdriver


<sup>\*</sup> Tools, recommended by our mechanics; propper installation can also be carried out with different tools.

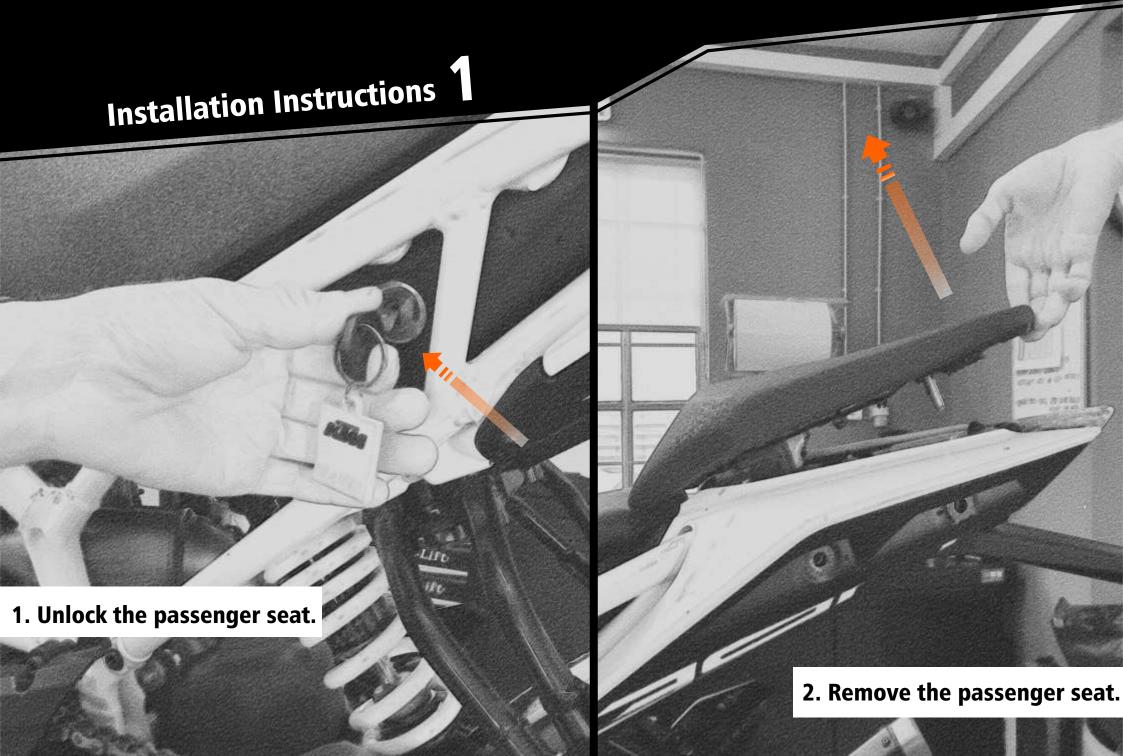




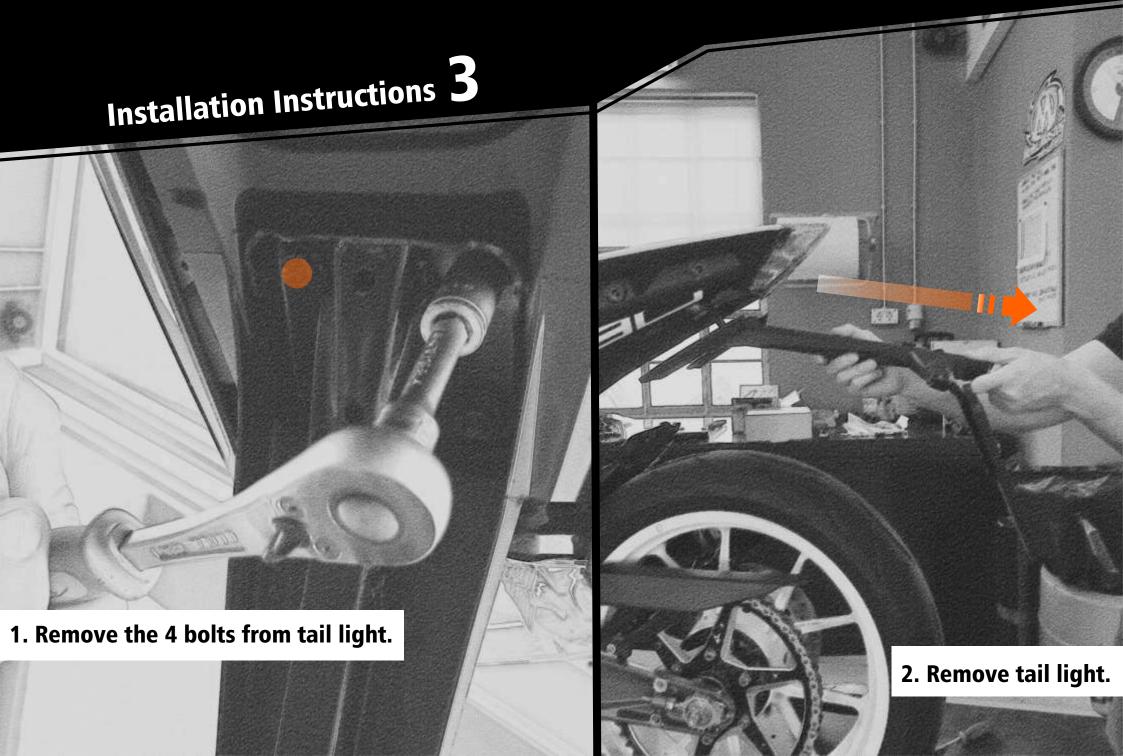



# Installation Instructions 4

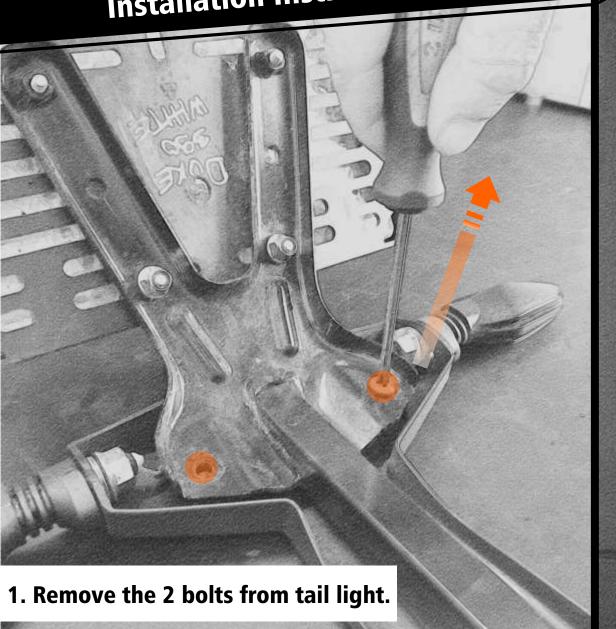


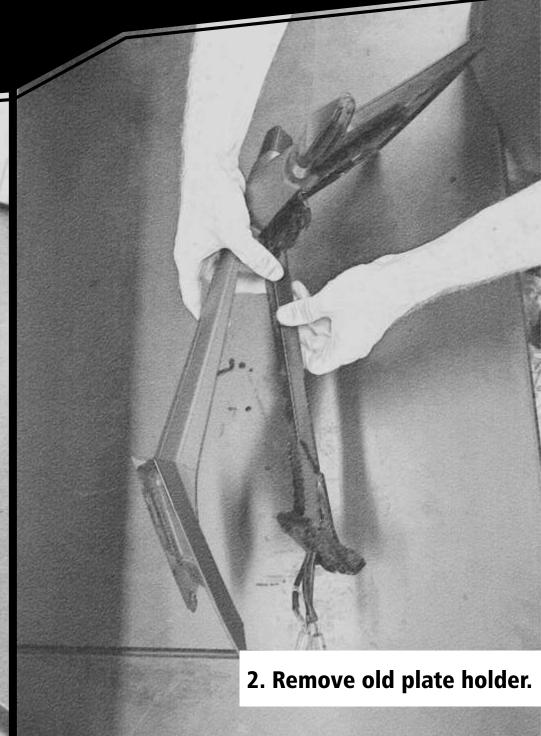


# Installation Instructions 4.1

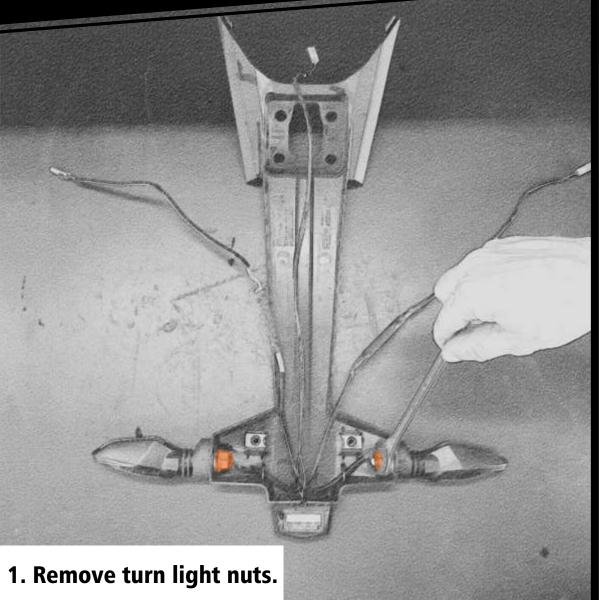


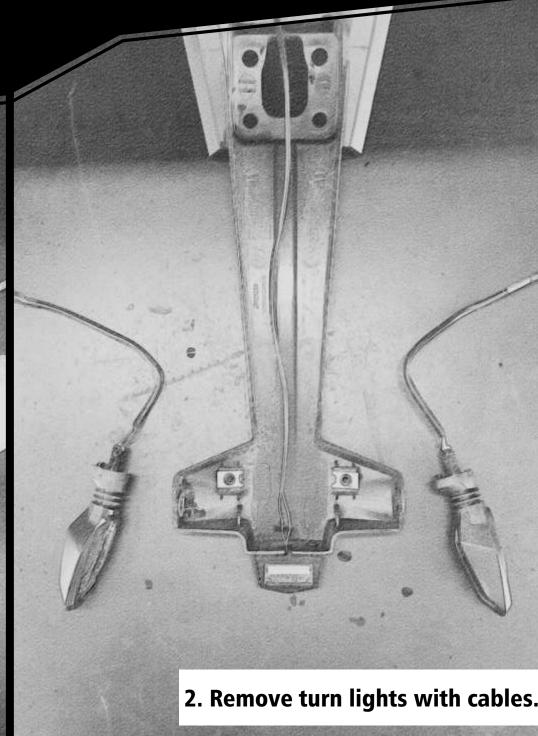

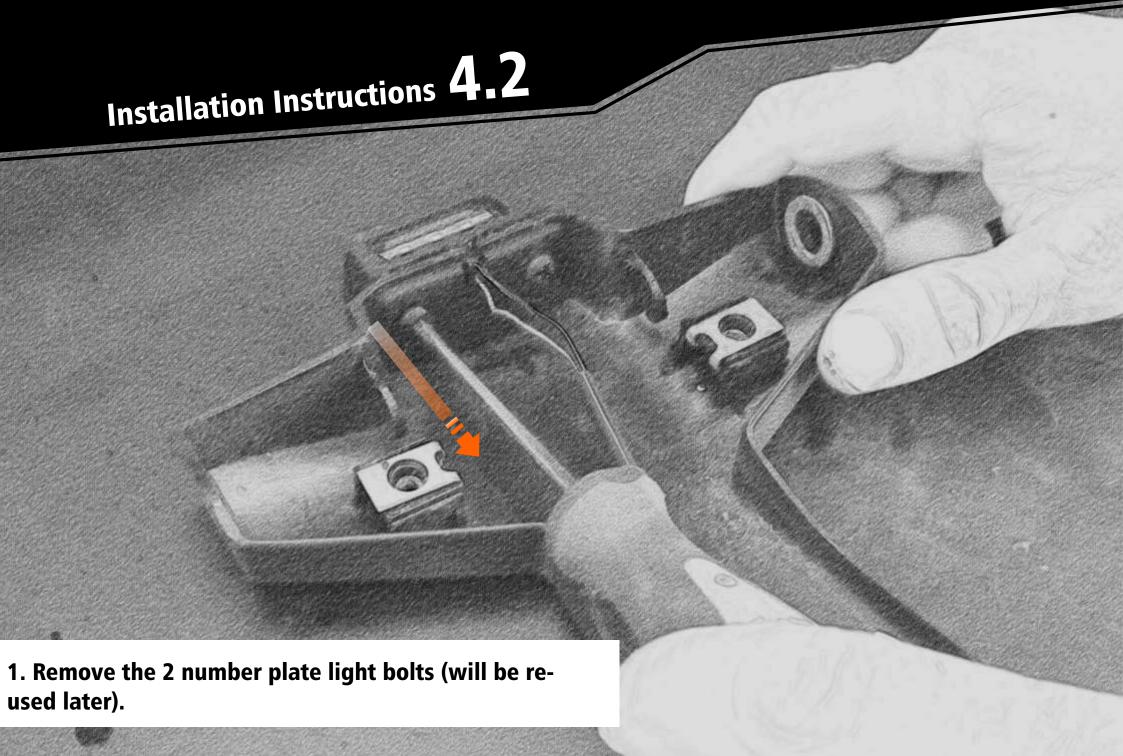

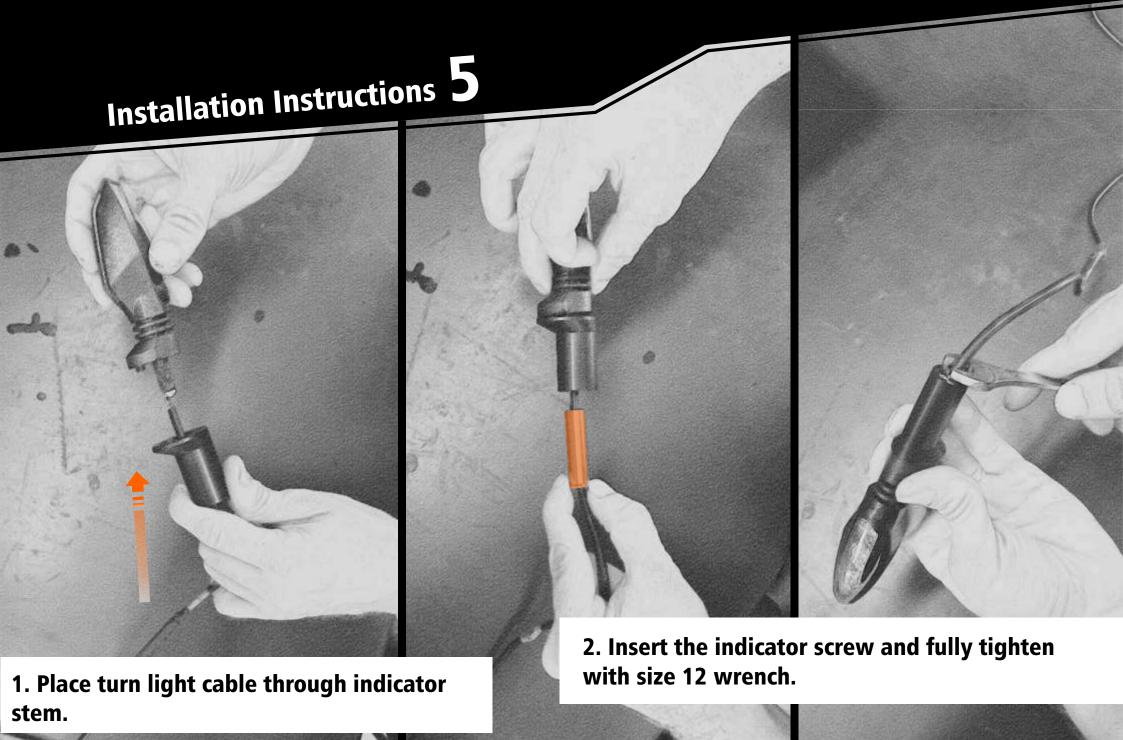


# Installation Instructions 8

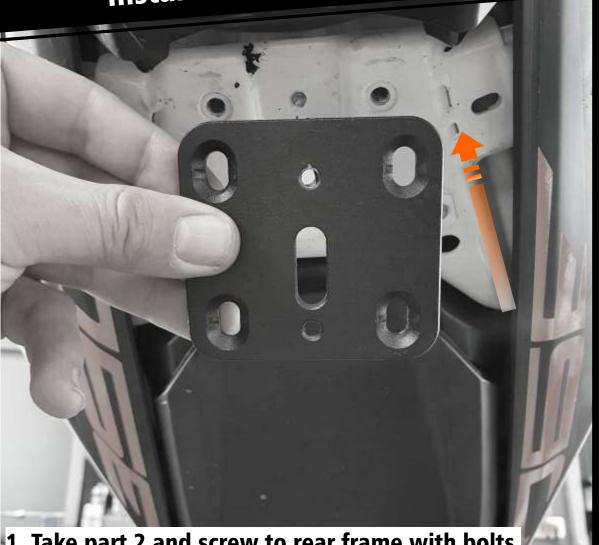



1. Take part 2 and screw to rear frame with bolts E. Fully tighten.




2. Take part 3, attach it to part 2 on frame first and attach part 5 with bolts B1 and B2.

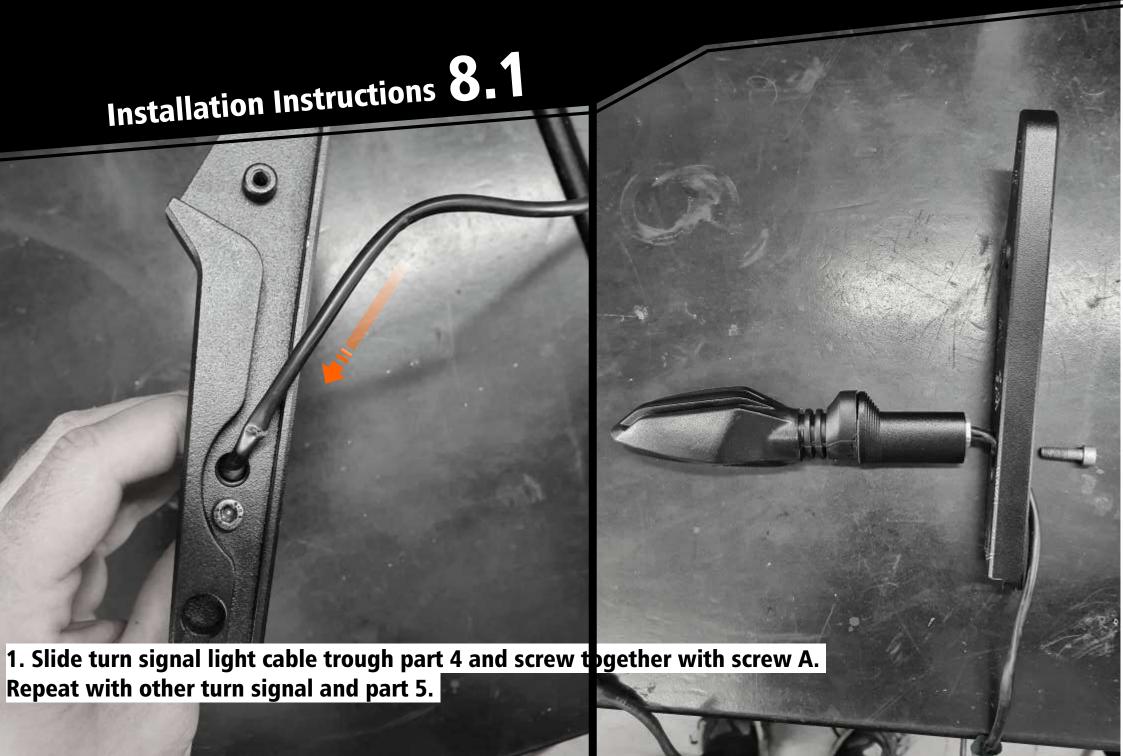


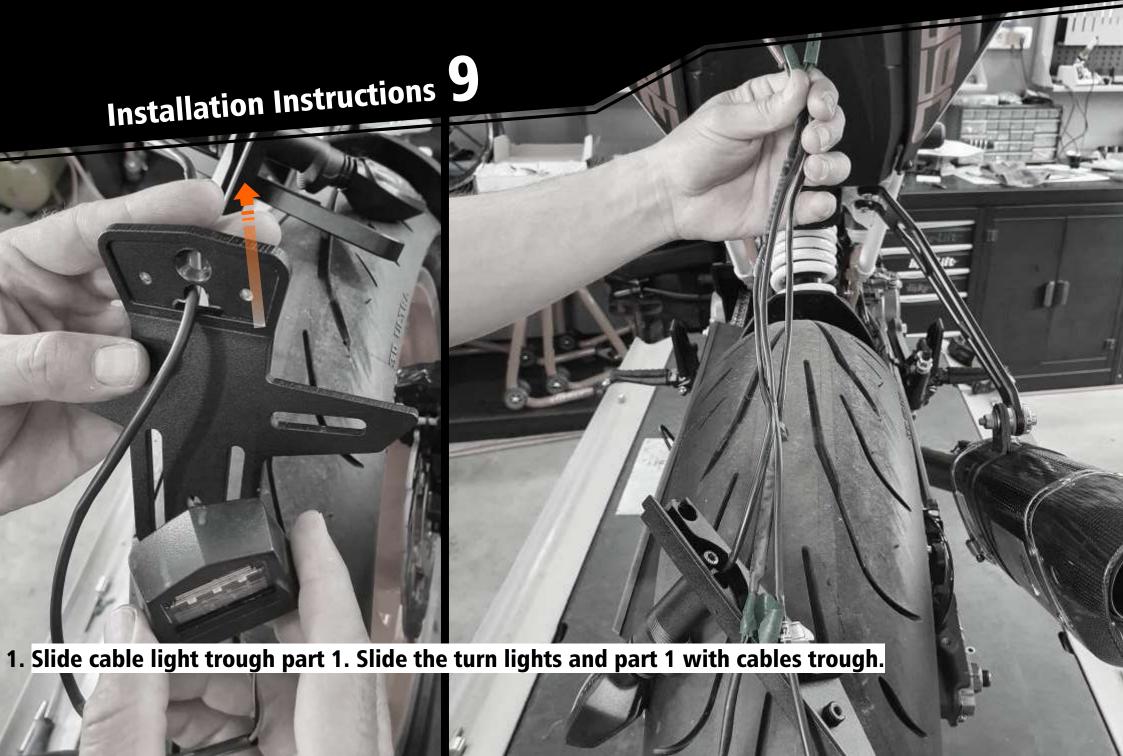


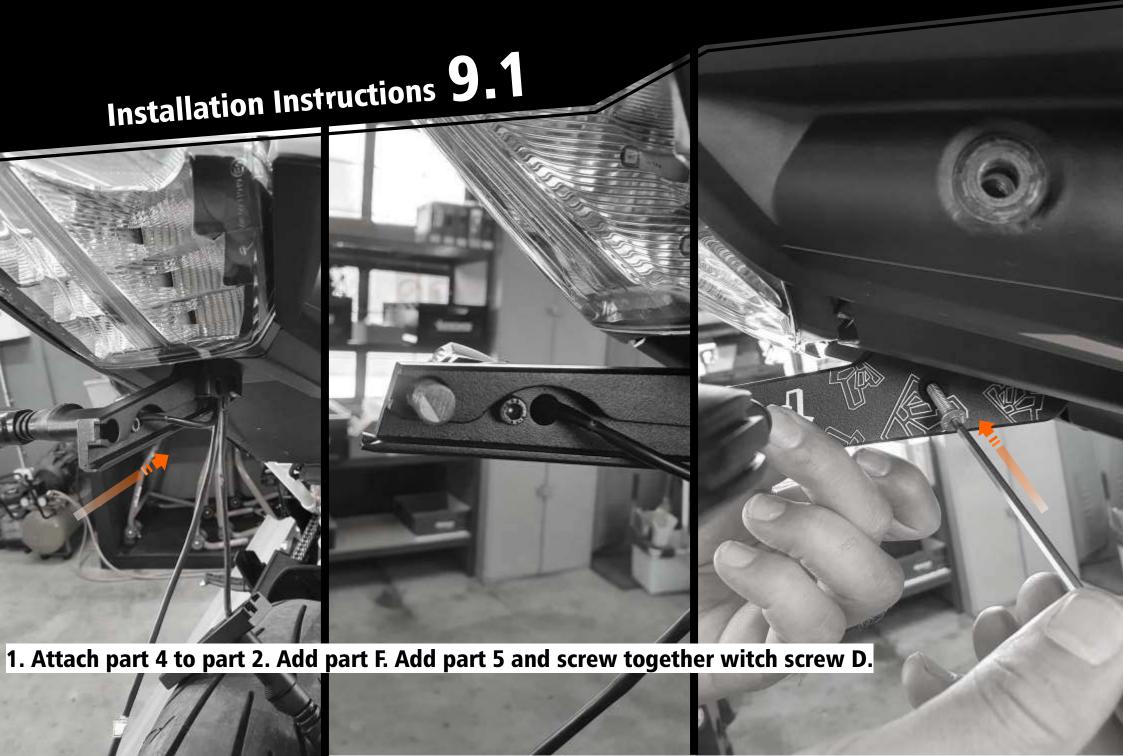

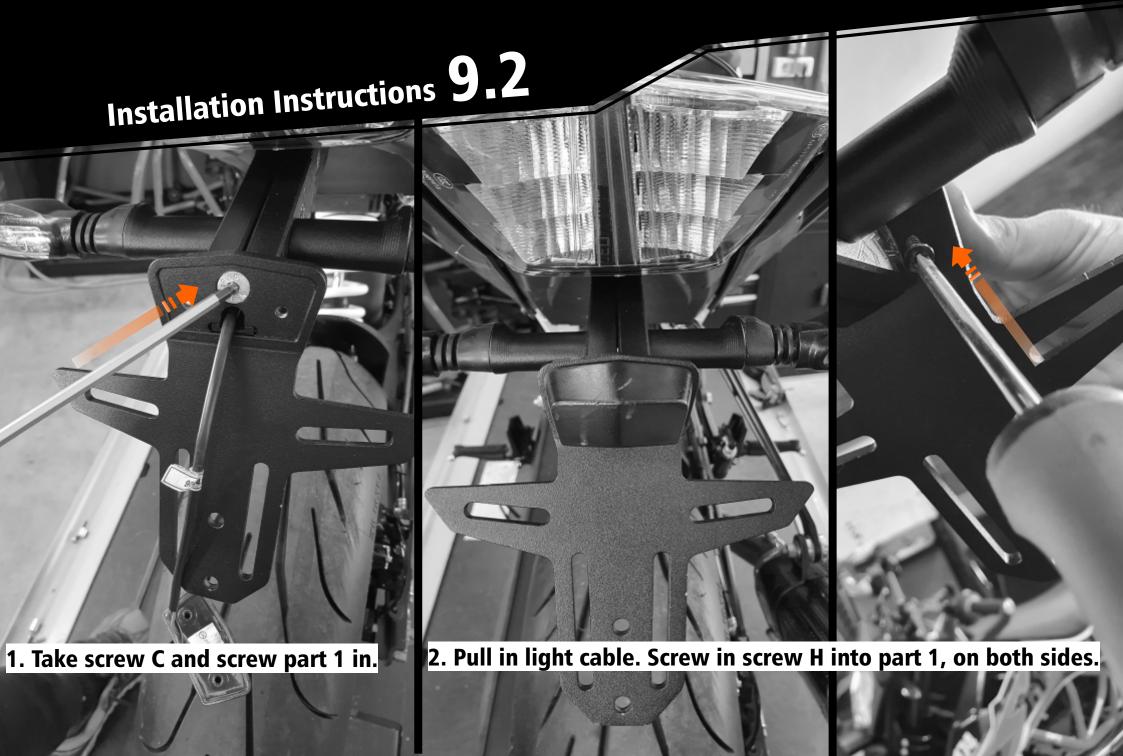

Installation Instructions 9.3

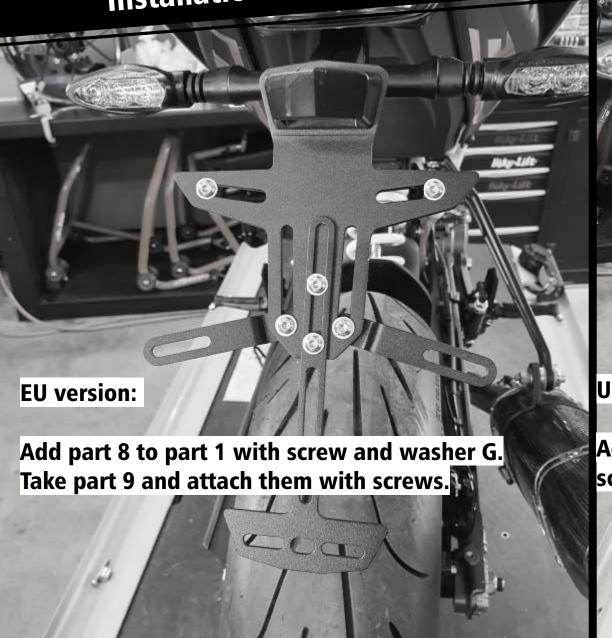

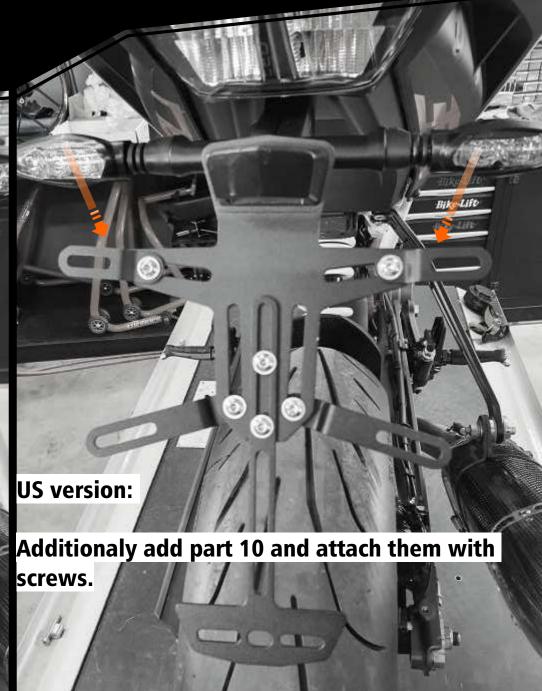

#### **⚠** IMPORTANT **⚠**

After installation of your tail tidy ensure that the license plate does not contact the rear tyre when suspension is fully compressed.

It is recommended that periodic inspections are made to ensure that all bolts are tightend.

Should the bike be involved in an accident a thorough inspection should be made and any components that have taken an impact, no matter how small, be replaced.

The manufacturer or supplier cannot be held responsible for products that are incorrectly mounted or inappropriately used.

It is recommended to check all connections regularly for tightness of fit.

Ensure all electrics including indicators, tail light, brake light and licence plate light lights are working correctly before riding the motorcycle.

## NOW YOU ARE READY... TO ROCK THE STREETS!



#### BAGOROSPERFORMANCE.com